


# OUR HARNESSED CABLES CREATE INNOVATIVE CONNECTIONS




UL CERTIFIED  
CABLE HARNESS

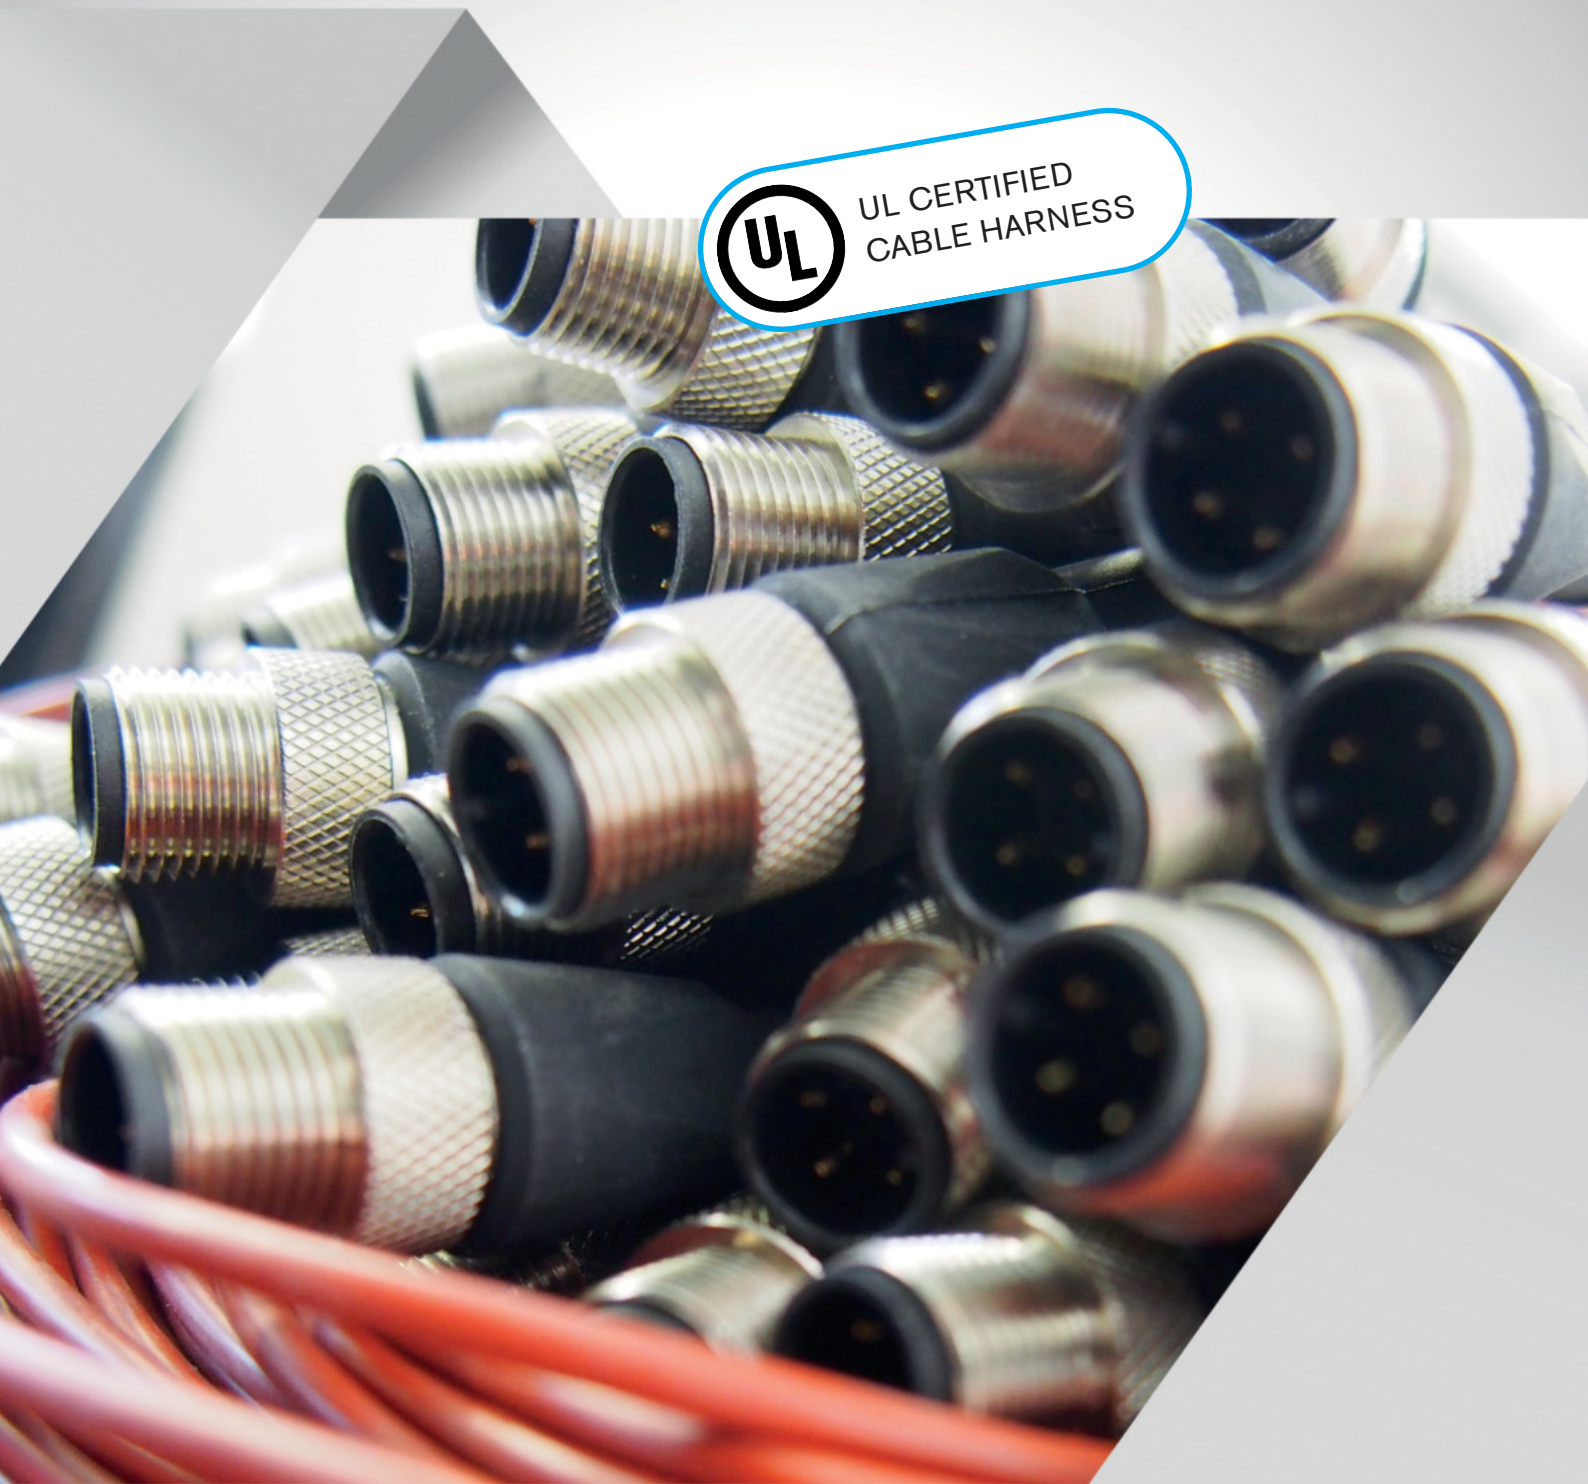

[www.sab-cable.com](http://www.sab-cable.com)



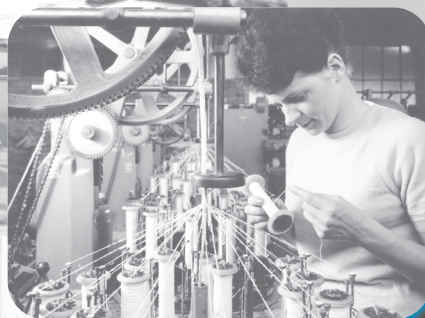

TRADITIONAL  
FAMILY BUSINESS  
SINCE **1947**



# CONTENT

## OVERVIEW

Who we are	4
SAB worldwide	5
Insights into our production	6-7
UL certified cable harness	8

## HARNESSED CABLES

■ USB 2.0 cable flexible at low temperatures	suitable for the application at extremely low temperatures	9
■ Harnessed COAX cable	with BNC connector assembly	10
■ Harnessed COAX cable	with high frequency connector assembly	11
■ Connection cable	between CAN-BUS interface and module	12
■ Connection cable	for measuring module and data logger	13
■ Connection cable	helix/semi-helix for measuring module and data logger	14
■ Combined cable harness	current supply and connection cable for CAN-Bus interface	15
■ Adapter cable	for the suitable connection	16
■ Patch cable	with RJ 45 connector assembly	17
■ Sensor cable	with circular connector assembly	18
■ Sensor cable	with M12 plug connector	19
■ Sensor cable BNC	with circular connector assembly	20
■ RG 316 - Multiple coaxial cable with total screen	for the easy cabling of 8 or 16 measuring channels	21
■ Connecting cable module/PC	for extreme demands	22
■ Current supply cable	for data transmission and voltage supply of modules	23
■ Special cable	with male connector and socket plug assembly	24
■ Cable harness for robots	with 37-pin angle plug, AMP/Molex connector assembly	25
■ Cable harness for robots	with Harting connector assembly and signal socket connector assembly	26
■ Multi bus cable	with 17-pole socket and plug connector	27
■ FEP insulated hybrid cable	with connector housing	28
■ Cable harness with valve connector	for special machine construction	29
■ Reeling CAT 5 cable	highly flexible with 8-pole RJ45 plug on a cable drum with angle plug	30
■ Special connection cable	with 320-pin port connector and 50-pin Sub-D male connector	31
■ Harnessed Profinet cable	suitable for cable tracks with M12 male connector assembly	32
■ Harnessed Profibus cable	suitable for cable tracks with M12 male connector assembly	33
■ Helix cable	with axial and radial outgoing cable ends	34
■ Request form		35



The examples shown above are only a selection of our possibilities. For other solutions our experts are always at your disposal. Please do not hesitate to contact our specialists who will advice you individually for your special application.

# WHO WE ARE

## A SURVEY

**75** years of experience in cable and wire manufacturing as well as in temperature measurement technology turned a one-man business into a company with more than 550 employees. We prove our strength every year with more than 1500 special products according to customers' requirements. Each product is a new challenge for our creative technical team. We at **SAB** see ourselves as a manufacturer and a service provider – in the sense of true partnership and the greatest possible customer orientation.

Today, the quality of our products is known and appreciated in more than 80 countries around the world. In all product ranges, we are certified according to DIN EN ISO 9001. Furthermore, we have implemented an environmental management system for our company according to DIN EN ISO 14001, an occupational health and safety management system according to DIN EN ISO 14001 and DIN ISO 45001, and an energy management system according to DIN EN ISO 50001.

And also for the future, our slogan is: **"WE CONTINUE!"**

FOUNDED:	1947 by Peter Bröckskes sen. an independent, medium-sized company.
CEO:	Peter Bröckskes and Sabine Bröckskes-Wetten
PLANT/LOCATION:	In Viersen (Lower Rhine) 110.000 m <sup>2</sup> company site.  Own manufacturing from copper conductor to outer sheath.  VDE proved burnchamber and laboratory within the company.
EMPLOYEES/WORKERS:	Approx. 430 at the plant in Viersen, 550 worldwide
YEARLY SALES:	Approx. 95 Mio. € worldwide
PRODUCTS:	Special Cables  Measurement Technology  Cable Harnessing

### CERTIFICATES AND APPROVALS:



HAR EN IEC ISO

Quality management system acc. to DIN EN ISO 9001  
for every manufacturing field

Environmental management system acc. to DIN EN ISO 14001

Occupational health and safety management  
acc. to NLF/ILO-OSH and DIN ISO 45001

Energy management system acc. to DIN EN ISO 50001

# WE ARE AT YOUR DISPOSAL, WHENEVER YOU NEED US ...

From our central stock in Viersen-Süchteln or our external stocks, we supply standard lengths as well as special dimensions, often within 24 hours. It is our strength to be at different places at the same time. This shows also our wide product range. Being always ready to deliver our products of constant quality is our strength at **SAB BRÖCKSKES**. Challenge, obligation - but also guarantee at the same time. This is your advantage - we are present whenever you need our assistance.

## HEAD OFFICE:

SAB BRÖCKSKES GmbH & Co. KG  
Grefrather Str. 204-212b  
41749 Viersen  
Germany

Phone: +49 (0) 2162 898-0  
Fax: +49 (0) 2162 898-101  
E-Mail: [info@sab-broeckskes.de](mailto:info@sab-broeckskes.de)  
Internet: <http://www.sab-worldwide.com>

## SUBSIDIARY NETHERLANDS:

SAB Bröckskes Benelux  
Bokkerijder 34  
NL- 5571 MX Bergeijk  
Netherlands

Phone: +31 497 575 201  
Fax: +31 497 577 217  
E-Mail: [info@broeckskes.nl](mailto:info@broeckskes.nl)  
Internet: <http://www.broeckskes.nl>

## SUBSIDIARY FRANCE EAST:

Cablerie SAB S.A.  
26, la Rue des Caillottes  
ZI Plaine des Isles  
89006 Auxerre Cedex  
France

Phone: +33 3 869 466 94  
Fax: +33 3 869 466 50  
E-Mail: [info@cablerie-sab.fr](mailto:info@cablerie-sab.fr)  
Internet: <http://www.sab-cable.eu>

## SUBSIDIARY FRANCE WEST:

Auxicom  
12 Rue de Clairières  
ZAC du Taillis 3 - BP 35  
44840 Les Sorinières  
France

Phone: +33 2 518 976 76  
Fax: +33 2 518 900 21  
E-Mail: [info@auxicom.fr](mailto:info@auxicom.fr)  
Internet: <http://www.auxicom.fr>

## SUBSIDIARY USA:

SAB North America  
344 Kaplan Drive  
Fairfield, NJ 07004  
USA

Phone: +1 973 276-0500  
Fax: +1 973 276-1515  
E-Mail: [info@sabcable.com](mailto:info@sabcable.com)  
Internet: <http://www.sabcable.com>

## SUBSIDIARY CHINA:

SAB Special Cable (Shanghai) Co. Ltd.  
Room 1705, Xinjian Mansion,  
No. 488, Yaohua Road,  
Pudong New District, Shanghai,  
China, 200126

Phone: +86 21 583 508 43  
Fax: +86 21 583 508 45  
E-Mail: [sales@sab-broeckskes.net](mailto:sales@sab-broeckskes.net)  
Internet: <http://www.sab-cable.net>

## REPRESENTATION KOREA:

TCC Thomas Cable Co. Ltd.  
20-4, Yeochon-Ri  
Ochang-Myun, Cheongwon-Kun  
Chungbuk 363-884  
Korea

Phone: +82 43 211 9900  
Fax: +82 43 211 5533  
E-Mail: [thomascable@thomaskorea.com](mailto:thomascable@thomaskorea.com)  
Internet: <http://www.thomas.co.kr>

## REPRESENTATION INDIA:

Alltronix  
C-340, 6th Cross, 1st Stage  
Peenya Industrial Estate  
Bangalore-560 058 Karnataka  
India

Phone: +91 / 80 4083 8383  
Fax: +91 / 80 4083 8305  
E-Mail: [mail@alltronixin.com](mailto:mail@alltronixin.com)  
Internet: <http://www.alltronixindia.com>

## REPRESENTATION RUSSIA:

Pozitron LLC  
Baumana road 19-46  
620017 Yekaterinburg  
Russian Federation

Phone: +7 (343) 289 13 16  
Phone/Fax: +7 (343) 289 13 17  
E-Mail: [info@pozitron-ekb.ru](mailto:info@pozitron-ekb.ru)  
Internet: <http://www.pozitron-ekb.ru>

## REPRESENTATION SINGAPORE:

Precision Technologies Pte Ltd  
211 Henderson Road #13 - 02  
Henderson Industrial Park  
Singapore 159552

Phone: +65 6273-4573  
Fax: +65 6273-8898  
E-Mail: [precision@pretech.com.sg](mailto:precision@pretech.com.sg)  
Internet: <http://www.pretech.com.sg>

## REPRESENTATION POLAND:

Kabel-Projekt  
Podkomorzego 3/15,  
Pruszcz Gdanski  
Poland

Phone: +48 602 211 405  
Phone: +48 602 841 928  
E-Mail: [krzysztof.pilip@kabel-projekt.com](mailto:krzysztof.pilip@kabel-projekt.com)  
Internet: <http://www.kabel-projekt.pl>

## REPRESENTATION TEMPERATURE MEASUREMENT BELGIUM:

Ets. Fabritius SPRL  
Av. van Volxem 180  
B-1190 Brussels · Belgium

Phone: +32-2-34 33 932  
Fax: +32-2-34 45 794  
E-Mail: [info@fabritius.be](mailto:info@fabritius.be)  
Internet: <http://www.fabritius.be>

# INSIGHTS

## INTO OUR PRODUCTION

**W**e at **SAB BRÖCKSKES** have enlarged our delivery program by the field of cable harnessing. No matter if standard or special construction, we design and produce high-quality cables and wires up to the ready-connected plug. Whether single conductor harnessing, harnessed cables or complete cable sets – we offer a broad program especially according to your requirements and specifications.


Our harnessed cables are used in various industrial branches. Thus, they are used for example in automobile industry, for machine plants and control system construction as well as in household appliance industries.

- various combinations of connector types and terminals
- many application fields of various materials and sheath materials
- construction according to your special requirements
- complete solutions
- high quality standard by continuous quality control






## ... EVERYTHING FROM ONE SOURCE

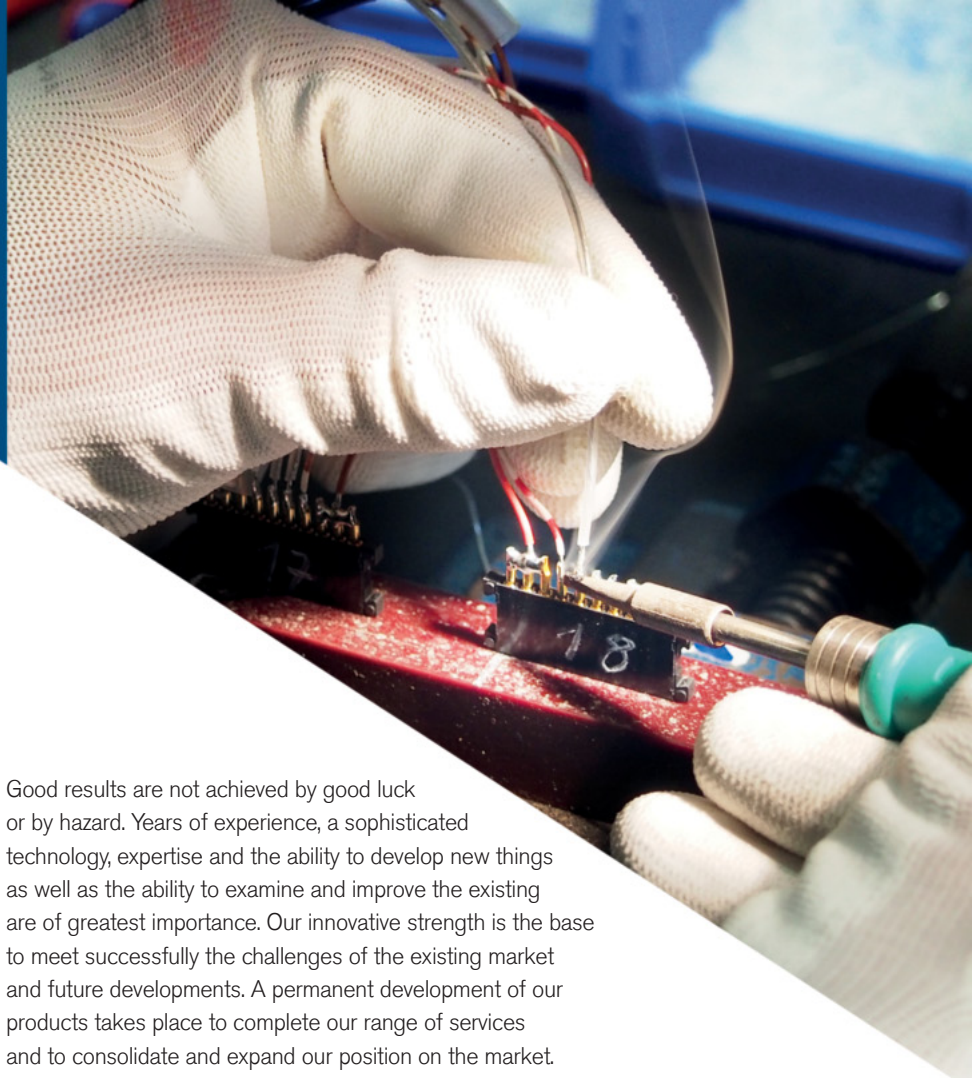

Good results are not achieved by good luck or by hazard. Years of experience, a sophisticated technology, expertise and the ability to develop new things as well as the ability to examine and improve the existing are of greatest importance. Our innovative strength is the base to meet successfully the challenges of the existing market and future developments. A permanent development of our products takes place to complete our range of services and to consolidate and expand our position on the market.

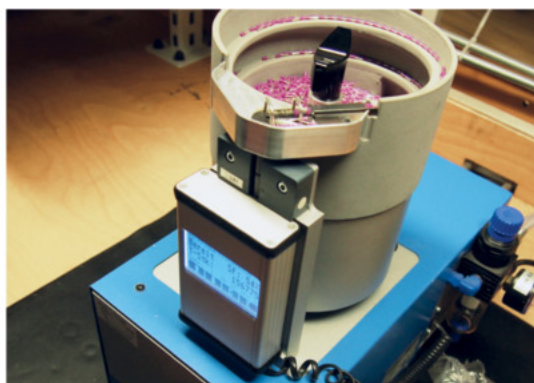

The varied combination possibilities of plug types and terminals as well as the different materials processed by us offer economic solutions.



In all product ranges we are certified acc. to DIN EN ISO 9001. Besides, we established an environmental management system for our company acc. to DIN EN ISO 14001, an occupational health and safety management acc. to NLF/ILO-OSH and DIN ISO 45001 as well as an energy management system acc. to DIN EN ISO 50001.



# HARNESSED CABLES



UL certified  
cable harness

**SAB** Bröckskes has completed its range of harnessed cables with the certification acc. to UL Standard Wiring Harness „category ZPFW2 (UL)“ and „ZPFW8 (Canada)“ and herewith strengthens its position as cable specialist for cable harness acc. to customer's specification.

Whenever harnessed cables are produced as component part of a final product for the North American and Canadian market, an UL certified cable harness is necessary. With the UL certification **SAB** ensures the detailed traceability of individual components as for example cables, plugs or sleeves and offers highest planning reliability also with special harnessing products.

Underwriter Laboratories Inc. (UL), an independent American test and certification authority confirms the use of the materials and documents required by the final customer according to the UL certification for "Wiring Harness" acc. to ZPFW2 and ZPFW8. In the manufacturer's data base ([www.ul.com](http://www.ul.com)) **SAB** is listed under file no. E473226 as a qualified and reliable manufacturer.

The requirements for UL certified cable harness are controlled by external audits every three months in order to guarantee the high requirements of the UL standards. Besides our cables, also harnessed versions, are tested in our own laboratory with regard to safety and reliability and are marked with the „Wiring Harness Label“.

On request **SAB** is able to manufacture cable harnessing products acc. to customer's specification acc. to UL Wiring Harnesses ZPFW2 and ZPFW8 from the cable to the harness and offers broad advice.

**CERTIFICATE OF COMPLIANCE**

Certificate Number 20150123-E473226  
Report Reference E473226-20150123  
Issue Date 2015-JANUARY-23

Issued to: SAB BROECKSKES GMBH & CO KG  
GREFRATHERSTRASSE 204-212B  
POSTFACH 12 01 60  
41749 VIERSEN GERMANY

This is to certify that representative samples of COMPONENT - WIRING HARNESSSES  
General Coverage

Have been investigated by UL in accordance with the Standard(s) indicated on this Certificate.

Standard(s) for Safety: Wiring Harnesses, Subject 764, and CSA Inform Wiring Harnesses No. 1

Additional Information: See the UL Online Certifications Directory at [www.ul.com/database](http://www.ul.com/database) for additional information

Only those products bearing the UL Certification Mark should be considered as being covered by UL's Certification and Follow-Up Service.

Recognized components are incomplete in certain constructional features or restricted in performance capabilities and are intended for use as components of complete equipment submitted for investigation rather than for direct separate installation in the field. The final acceptance of the component is dependent upon its installation and use in complete equipment submitted to UL LLC.

Look for the UL Certification Mark on the product.

*B. Mattheis*  
Bruce Mattheis, Assistant Chief Engineer, Global Inspection and Field Services  
UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at [www.ul.com/customer-service](http://www.ul.com/customer-service).

Page 1 of 1



# HARNESSED CABLES

## USB 2.0 cable flexible at low temperatures

suitable for the application at extremely low temperatures



### THE SPECIALIST FOR LOW TEMPERATURES

The requirements on automobiles of tomorrow are growing more and more and are highly specialised. In order to fulfil those requirements the applications outside are intensifying especially in the range of test vehicles. The test runs take place under harsh ambient conditions for example in arctic areas. As a consequence the requirements on the harnesses are also becoming harder. On this basis SAB has developed a USB 2.0 cable that is appropriate for permanent flexible use at -25°C.

#### CABLE CONSTRUCTION

<b>conductor:</b>	tinned copper strands / silver-plated copper strands
<b>core insulation:</b>	polymer
<b>screen:</b>	alu foil / tinned copper braiding
<b>outer sheath:</b>	Besilen®
<b>sheath colour:</b>	black (RAL 9011)
<b>dimension:</b>	(2 x 0,22 mm <sup>2</sup> )ST + 2 x 0,50 mm <sup>2</sup>

#### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-25°C/+180°C
<b>fixed laying:</b>	-40°C/+180°C
<b>special feature:</b>	flexible at low temperatures
<b>outer diameter:</b>	approx. 6,0 mm

#### Further cable types are possible on request for example:

- ✓ further dimensions
- ✓ other sheath colours and marking
- ✓ different cable lengths

#### Free choice of cable harness:

- ☐ USB-A-plug
- ☐ USB-A-socket
- ☐ USB-B-plug
- ☐ USB-B-socket

# HARNESSED CABLES

## Harnessed COAX cable

with BNC connector assembly



SAB BRÖCKSKES offers different cable harnesses for high frequency technique (radio, audio and video communication), among others coax cables with different bayonet connectors (BNC). The bayonet offers a reliable connection. Also for this cable harness you can choose different cable and connector types in order to adapt the product to your special requirement profile. SAB has specialised on the particular industrial demands and has developed the corresponding solutions.

### CABLE CONSTRUCTION

<b>conductor:</b>	silver-plated copper strands 0,55 mm <sup>2</sup>
<b>core insulation:</b>	polymer
<b>screen:</b>	silver-plated copper braiding
<b>outer sheath:</b>	special material
<b>sheath colour:</b>	black (RAL 9005)

### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-40°C/+125°C
<b>fixed laying:</b>	-50°C/+125°C
<b>short-time use:</b>	+150°C
<b>special feature:</b>	silicone free, 75 Ω

#### Among others the following cable types belong to our delivery program:

- ✓ RG 316
- ✓ RG 58
- ✓ RG 179
- ✓ coax cables with 50 Ω or 75 Ω
- ✓ cables with heat resistant silicone free outer sheath up to +125°C


#### Please choose from the following plug connectors:

- ☐ Huber & Suhner BNC plug connector
- ☐ Telegärtner BNC plug connector
- ☐ Amphenol BNC plug connector
- ☐ insulated and uninsulated BNC plug connector

# HARNESSED CABLES

## Harnessed COAX cable

with high frequency connector assembly

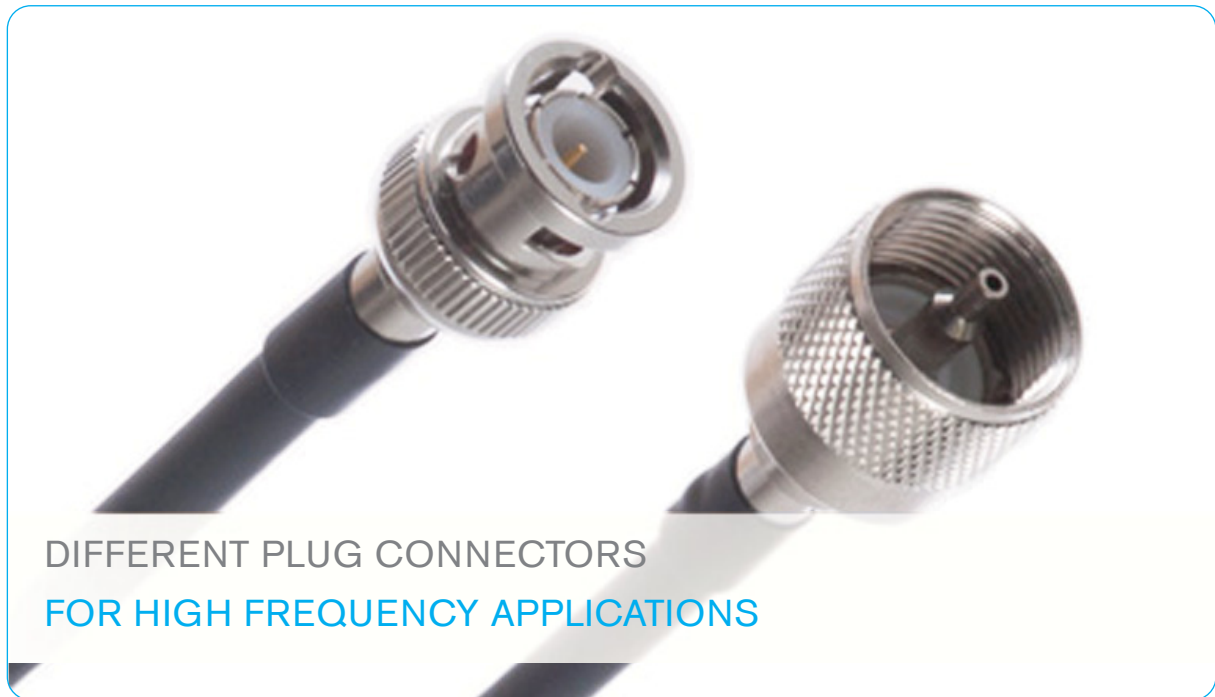

Besides cable harnesses with BNC plug connectors, SAB BRÖCKSKES offers further harnesses for high frequency applications for example coax cables with UHF-, mini-UHF or SMB connectors. We don't have a standard product range but special products for individual application ranges. These special applications are for example the requirements on temperature or flexibility.

### CABLE CONSTRUCTION

<b>conductor:</b>	silver-plated copper strands 0,55 mm <sup>2</sup>
<b>core insulation:</b>	polymer
<b>screen:</b>	silver-plated copper braiding
<b>outer sheath:</b>	special material
<b>sheath colour:</b>	black (RAL 9005)

### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-40°C/+125°C
<b>fixed laying:</b>	-50°C/+125°C
<b>short-time use:</b>	+150°C
<b>special feature:</b>	silicone free, 75 Ω

#### Among others the following cable types belong to our delivery program:

- ✓ low-noise cable
- ✓ RG 316
- ✓ RG 58
- ✓ RG 179
- ✓ coax cables with 50 Ω or 75 Ω
- ✓ cables with heat resistant, flexible outer sheath up to +150°C

#### Please choose from the following plug connectors:

- ☐ UHF plug connector
- ☐ mini UHF plug connector
- ☐ MMCX plug connector
- ☐ SMB plug connector
- ☐ ...



# HARNESSED CABLES

## Connection cable

between CAN-BUS interface and module



### CABLE AND PLUG COMBINATION FOR AN OPTIMAL CONNECTION

The SAB BRÖCKSKES delivery program also includes cable harnesses that are used as connection cable between CAN-BUS interfaces and different modules (for example thermo- or A/D module). There is the possibility to choose between different cable types and plug combinations. The connectors can be adapted to the module with regard to size, type, number of pins and pin configuration. Furthermore, different cables are available that are suitable for different applications.

#### CABLE CONSTRUCTION

<b>conductor:</b>	tinned copper strands
<b>core insulation:</b>	polymer
<b>screen:</b>	tinned copper braiding
<b>outer sheath:</b>	special material
<b>sheath colour:</b>	black (RAL 9005)

#### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-40°C/+125°C
<b>fixed laying:</b>	-50°C/+125°C
<b>short-time use:</b>	+150°C
<b>special feature:</b>	silicone free

#### Further cable types are possible on request for example:

- ✓ sheath material up to +125°C, silicone free
- ✓ different cable lengths
- ✓ variations regarding sheath colour and marking
- ✓ different dimensions, sections and numbers of cores (dependant on plug)

#### You can choose from the following plug connectors:

- |  |   |
|--|---|
| <input type="checkbox"/> Lemo connector    | <input type="checkbox"/> Yamaichi connector   |
| <input type="checkbox"/> ODU connector     | <input type="checkbox"/> different SUB-D connector<br>(for example 9-pole/ 25-pole) |
| <input type="checkbox"/> Fischer connector |   |

#### Connection ends for example:

- ✓ round plug connector 7-pole  
SUB-D 9-pole

#### Cable variations for example:

- ☐ 2 x 0,15 mm<sup>2</sup>
- ☐ 7 x 0,15 mm<sup>2</sup>

# HARNESSED CABLES

## Connection cable

for measuring module and data logger



Also harnessed connection cables for measuring modules and data logger (CAN cable) belong to the SAB product range. These harnessed cables have been mainly developed for the application in test vehicles and test benches, nevertheless they can also be used in other fields. The customer can choose between different cable and plug combinations. The plugs can be adapted with regard to size, construction form, number of poles and pin assignment to the module respectively logger. Furthermore, different cable types can be chosen which are suitable for different application fields.

### CABLE CONSTRUCTION

<b>conductor:</b>	tinned copper strands
<b>core insulation:</b>	polymer
<b>screen:</b>	tinned copper braiding
<b>outer sheath:</b>	special material
<b>sheath colour:</b>	black (RAL 9005)

### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-40°C/+90°C
<b>fixed laying:</b>	-50°C/+90°C
<b>short-time use:</b>	+125°C
<b>special feature:</b>	silicone free

#### Further cable types are possible on request for example:

- ✓ sheath material up to +150°C, silicone free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and numbers of cores (dependant on plug)

#### You can choose from the following plug connectors:

- ☐ Lemo connector
- ☐ ODU connector
- ☐ Fischer connector
- ☐ Yamaichi connector

#### Connection ends for example:

- ✓ round plug connector 5-pole at both sides
- ✓ round plug connector 9-pole at both sides

#### Cable variations for example:

- ☐ 2 x AWG 28 + 1 x AWG 28 + 2 x 0,50 mm<sup>2</sup>
- ☐ 2 x AWG 28 + 8 x AWG 28

# HARNESSED CABLES

## Connection cable

helix/semi-helix for measuring module and data logger



Besides the straight versions SAB offers 2 special types of connection cables. The first one has got a complete helix with a cable length of 0,3 m. The second version is a semi-helix with a cable length of 0,15 m. The advantage of this construction type is that the measuring module respectively data logger can be placed and connected close beside each other. Also for this construction type you can choose between different cable and plug combinations. The plugs can be adapted to the module respectively logger with regard to size, type number of poles and pin assignment. Furthermore, you can choose between different cable types for different applications.

### CABLE CONSTRUCTION

<b>conductor:</b>	tinned copper strands
<b>core insulation:</b>	polymer
<b>screen:</b>	tinned copper braiding
<b>outer sheath:</b>	special material
<b>sheath colour:</b>	black (RAL 9005)

### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-40°C/+90°C
<b>fixed laying:</b>	-50°C/+90°C
<b>short-time use:</b>	+125°C
<b>special feature:</b>	silicone free

#### Further cable types are possible on request for example:

- ✓ sheath material up to +150°C, silicone free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and numbers of cores (dependant on plug)

#### You can choose from the following plug connectors:

- ☐ Lemo connector
- ☐ ODU connector
- ☐ Fischer connector
- ☐ Yamaichi connector

#### Connection ends for example:

- ✓ round plug connector 5-pole at both sides
- ✓ round plug connector 9-pole at both sides

#### Cable variations for example:

- ☐ 2 x AWG 28 + 1 x AWG 28 + 2 x 0,50 mm<sup>2</sup>
- ☐ 2 x AWG 28 + 8 x AWG 28



# HARNESSED CABLES

## Combined cable harness

current supply and connection cable for CAN-Bus interface



### POWER AND CONNECTION IN ONE CABLE HARNESS

Another type is the combination of 2 functions in one cable harnessing product. In this way you can put the power supply and the connection cable for the CAN BUS interface in one cable harness. Herewith, you also have the possibility to choose from many components in order to develop a cable harnessing product according to the special requirements of the customer.

#### CABLE CONSTRUCTION

<b>conductor:</b>	tinned copper strands
<b>core insulation:</b>	polymer
<b>outer sheath:</b>	special material
<b>sheath colour:</b>	black (RAL 9005)

#### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-40°C/+90°C
<b>fixed laying:</b>	-50°C/+90°C
<b>short-time use:</b>	+125°C
<b>special feature:</b>	silicone free

#### Further cable types are possible on request for example:

- ✓ sheath material up to +150°C, silicone free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and numbers of cores (dependant on plug)

#### You can choose from the following plug connectors:

- ☐ Lemo connector
- ☐ ODU connector
- ☐ RJ 45 connector
- ☐ SUB-D connector
- ☐ segment connector

#### Construction examples:

- ☐ round plug connector  
2 x segment plugs  
+ 1 SUB-D connector
- ☐ round plug connector  
2 x segment plugs  
+ 1 round plug connector
- ☐ round plug connector  
2 x segment plugs  
+ RJ 45 plug


#### Cable variations for example:

- ☐ 2 x AWG 28 + 1 x AWG 28 +  
2 x 0,50 mm<sup>2</sup>

# HARNESSED CABLES

## Adapter cable

for the suitable connection

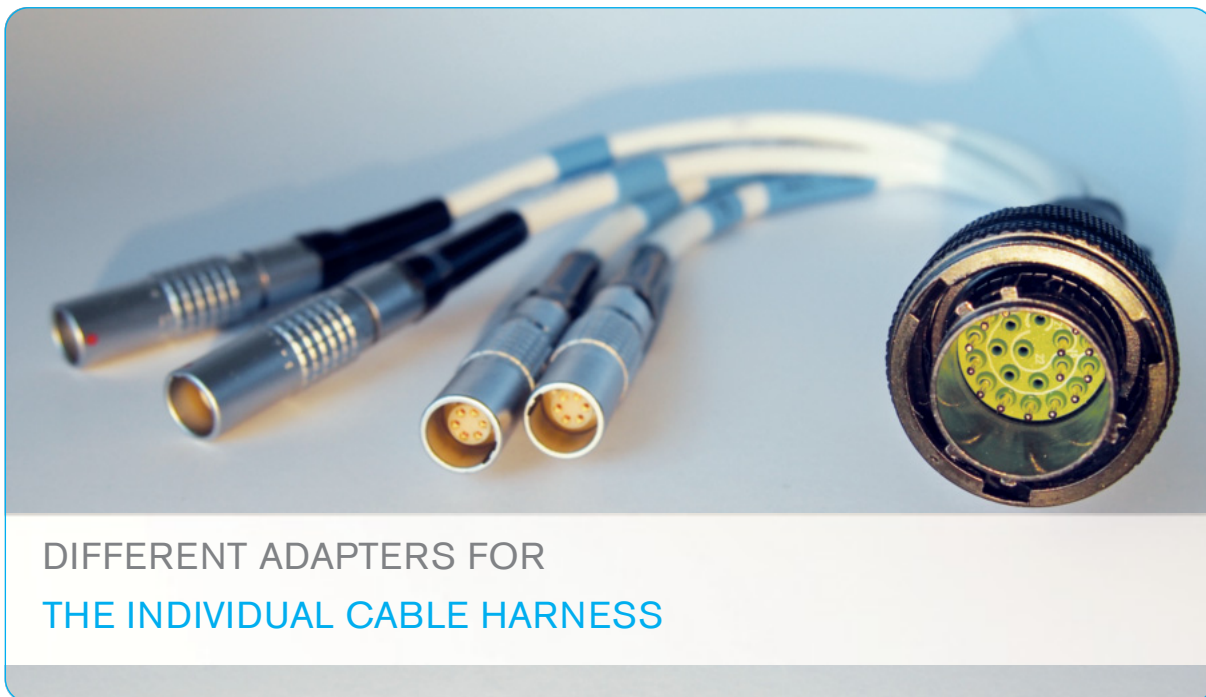

### DIFFERENT ADAPTERS FOR THE INDIVIDUAL CABLE HARNESS

SAB offers different adapters in its product range. These can be designed acc. to special requirements. For example to combine two connection cables so that they have a bigger total length or in order to prolong a sensor cable. The adapters are individually made for the corresponding cable harness or sensor (pin assignment, size, number of poles, etc.)

#### CABLE CONSTRUCTION

<b>conductor:</b>	tinned copper strands
<b>core insulation:</b>	polymer
<b>screen:</b>	tinned copper braiding
<b>outer sheath:</b>	special material
<b>sheath colour:</b>	black (RAL 9005)

#### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-40°C/+90°C
<b>fixed laying:</b>	-50°C/+90°C
<b>short-time use:</b>	+125°C
<b>special feature:</b>	silicone free

#### Further cable types are possible on request for example:

- ✓ sheath material up to +150°C, silicone free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and numbers of cores (dependant on plug)

#### You can choose from the following plug connectors:

- ☐ Lemo connector
- ☐ ODU connector
- ☐ Fischer connector
- ☐ Yamaichi connector

#### Connection ends for example:

- ✓ round plug connector 5-pole at both sides
- ✓ round plug connector 9-pole at both sides


#### Cable variations for example:

- ☐ 2 x AWG 28 + 1 x AWG 28 + 2 x 0,50 mm<sup>2</sup>
- ☐ 2 x AWG 28 + 8 x AWG 28
- ☐ 2 x 2 x AWG 28 + 1 x AWG 28

# HARNESSED CABLES

## Patch cable

with RJ 45 connector assembly

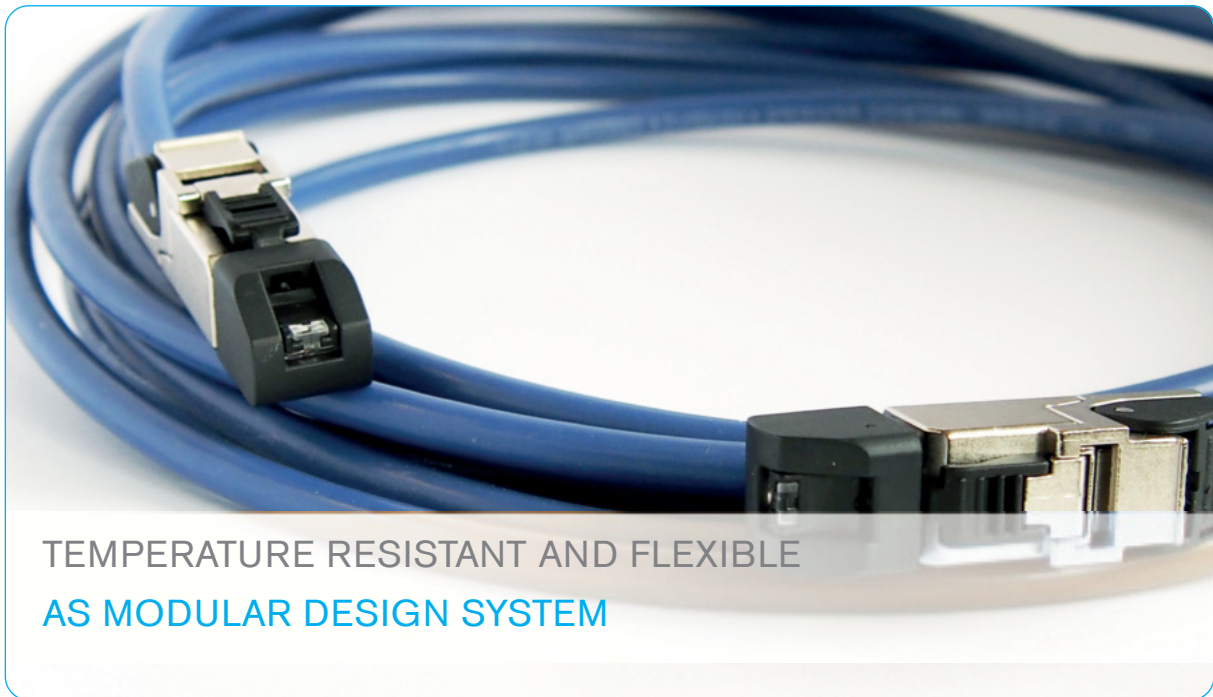

TEMPERATURE RESISTANT AND FLEXIBLE  
AS MODULAR DESIGN SYSTEM

Wherever patch or connection cables with RJ 45 connectors are needed for communication and network technique with particular requirements on temperature resistance or flexibility, SAB BRÖCKSKES has got the corresponding solution in its portfolio. Due to the offer of different plug connectors and our own cable production, the cable harness can be designed individually.

### CABLE CONSTRUCTION

<b>conductor:</b>	silver-plated copper strands
<b>core insulation:</b>	PE
<b>screen:</b>	alu foil / tinned copper braiding
<b>outer sheath:</b>	special material
<b>sheath colour:</b>	blue (RAL 5015)

### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-40°C/+90°C
<b>fixed laying:</b>	-50°C/+90°C
<b>short-time use:</b>	+125°C
<b>special feature:</b>	silicone free, Cat. 6

#### Further cable types are possible on request for example:

- ✓ Besilen® flexible with cold temperatures to -40°C / Besilen® heat resistant up to +220°C
- ✓ sheath material up to 150°C, silicone free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and number of cores appropriate for CAT 5, CAT 6, CAT 7

#### You can choose from the following plug connectors:

- ☐ Harting
- ☐ Weidmüller
- ☐ Telegärtner
- ☐ Yamaichi

#### Free choice of pin assignment:

- ☐ EIA/TIA 568A
- ☐ EIA/TIA 568B
- ☐ IEC
- ☐ REA
- ☐ DIN 47.100

Also possible as crossover cable!

#### Cable variations for example:

- ☐ 2 x 2 x 0,22 mm<sup>2</sup>
- ☐ 4 x 2 x 0,22 mm<sup>2</sup>



# HARNESSED CABLES

## Sensor cable

with circular connector assembly



### HARNESSED SENSOR CABLES FOR PRESSURE, ACCELERATION AND FLOW SENSORS

For different products in sensor technique, SAB BRÖCKSKES offers harnessed sensor cables. It doesn't matter if it concerns pressure, acceleration or flow sensors, we have the adequate solution in our product portfolio. One type is the cable harness with round connectors. These can be adapted with regard to number of poles, encoding, size, etc. to your special application. We can also offer the cable harness with one free end.

#### CABLE CONSTRUCTION

<b>conductor:</b>	tinned copper strands
<b>core insulation:</b>	polymer
<b>screen:</b>	tinned copper braiding
<b>outer sheath:</b>	special material
<b>sheath colour:</b>	white (RAL 9010)

#### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-40°C/+90°C
<b>fixed laying:</b>	-50°C/+90°C
<b>short-time use:</b>	+125°C
<b>special feature:</b>	silicone free

#### Further cable types are possible on request for example:

- ✓ Besilen® flexible with cold temperatures to -40°C / Besilen® heat resistant up to +220°C
- ✓ sheath material up to 150°C, silicone free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and number of cores (dependant on plug)

#### Cable variations for example:

- 2 x 2 x AWG 24 + x AWG 24/7
- 7 x 0,15 mm<sup>2</sup>

#### You can choose from the following plug connectors:

- Lemo connector
- ODU connector
- Fischer connector
- Yamaichi connector

# HARNESSED CABLES

## Sensor cable

with M12 plug connector



### HARNESSED CABLES WITH M 12 CONNECTOR

Harnessed sensor cable with a round plug connector and a M12 connector for the linking of the sensor (for example pressure sensor) with a module. The harnessed product can be designed according to the individual application. There are different plug and cable types available.

#### CABLE CONSTRUCTION

<b>conductor:</b>	tinned copper strands
<b>core insulation:</b>	FEP
<b>screen:</b>	tinned copper braiding
<b>outer sheath:</b>	FEP
<b>sheath colour:</b>	white (RAL 1013)

#### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-55°C/+180°C
<b>fixed laying:</b>	-90°C/+180°C
<b>short-time use:</b>	+205°C
<b>special feature:</b>	silicone free chemical resistance

#### Among others the following cable types belong to our delivery program:

- ✓ sheath material up to + 125°C or + 150°C, silicone free and flexible
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and number of cores (dependant on plug)


#### You can choose from the following plug connectors:

- ☐ M12 connector, molded
- ☐ Lemo round connector
- ☐ ODU round connector

# HARNESSED CABLES

## BNC Sensor cable

with circular connector assembly

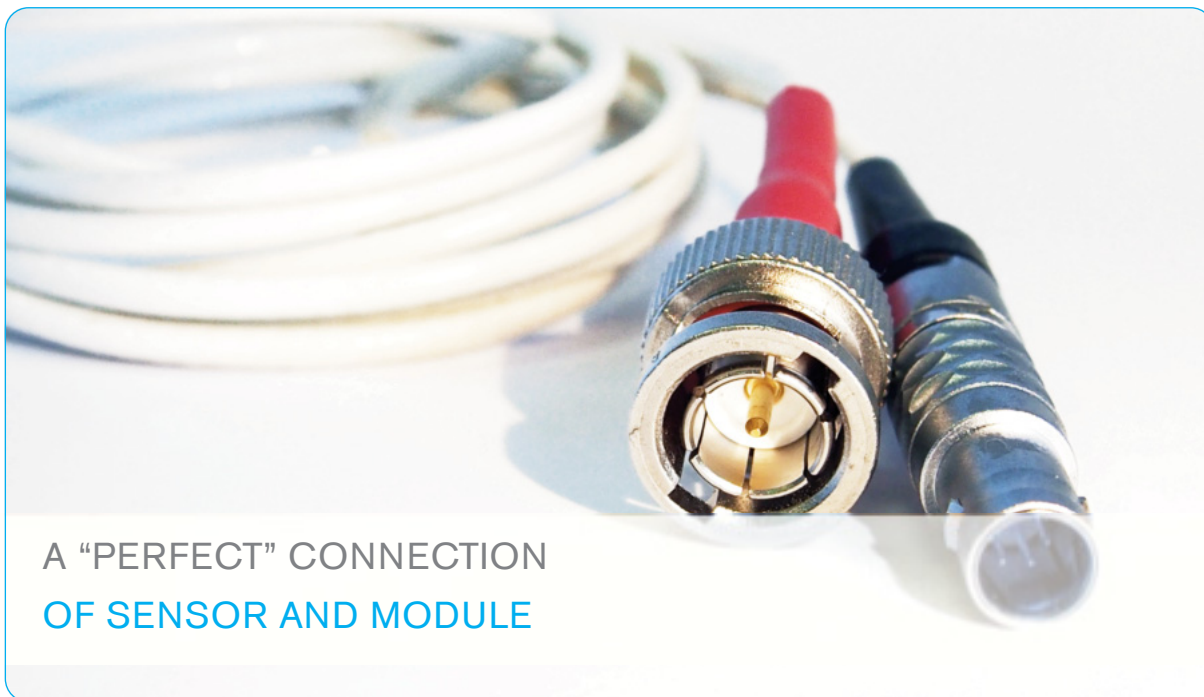

Harnessed sensor cable with a round plug connector and a BNC plug for the linking of the sensor with the module. The harnessed product can be designed according to the individual application. There are different plug and cable types available.

### CABLE CONSTRUCTION

<b>conductor:</b>	silver-plated copper strands 0,55 mm <sup>2</sup>
<b>core insulation:</b>	polymer
<b>screen:</b>	silver-plated copper braiding
<b>outer sheath:</b>	special material
<b>sheath colour:</b>	white (RAL 9010)

### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-40°C/+125°C
<b>fixed laying:</b>	-50°C/+125°C
<b>short-time use:</b>	+150°C
<b>special feature:</b>	silicone free, 75 Ω

Among others the following cable types belong to our delivery program:

- ✓ RG 316
- ✓ RG 58
- ✓ RG 179
- ✓ coax cables with 50 Ω or 75 Ω
- ✓ cables with heat resistant, silicone free outer sheath up to +125°C

You can choose from the following plug connectors:

- ☐ Huber & Suhner BNC plug connector
- ☐ Telegärtner BNC plug connector
- ☐ Insulated and not insulated BNC plug connector
- ☐ Lemo round plug connector
- ☐ ODU round plug connector



# HARNESSED CABLES

## RG 316 - Multiple coaxial cable with total screen

for the easy cabling of 8 or 16 measuring channels



Measuring tasks are becoming more and more complex and the number of measuring points to be evaluated is increasing. This causes a bigger cabling effort. In order to simplify this task, SAB BRÖCKSKES has developed two new cable types. Both cables are highly flexible and robust at the same time. With the used PUR outer sheath temperatures of up to + 125 °C (2500h) can be achieved. For long distances the cables can be mounted on cable drums which can be handled easily.


### CABLE CONSTRUCTION

<b>conductor:</b>	tinned copper strands
<b>core insulation:</b>	FEP
<b>screen:</b>	tinned copper braiding
<b>inner sheath:</b>	TPE, black numbered
<b>total screen:</b>	tinned copper braiding
<b>outer sheath:</b>	PUR
<b>sheath colour:</b>	black (RAL 9005)

### TECHNICAL DATA

<b>voltage:</b>	900 V
<b>temperature range</b>	
<b>flexible application:</b>	-40°C/+90°C
<b>fixed laying:</b>	-50°C/+90°C
<b>short-time use:</b>	+125°C (2500h)
<b>characteristic impedance:</b>	50 Ω ± 5 Ω
<b>frequency range:</b>	max. 3 GHz

Item no.	nominal cross-section mm <sup>2</sup>	outer-ø mm	copper figure kg/km	cable weight kg/km
3600-9025	8 x 26 AWG	11,6	132,0	189
3600-9026	16 x 26 AWG	15,0	253,2	339



Available as plug and measuring solution with harnessed BNC connector assembly resp. SUB-D connectors.

# HARNESSED CABLES

## Connecting cable module/PC

for extreme demands



### DIFFERENT MEASURING TECHNIQUE VALUES ANALYSE AND DISPLAY

In order to be able to analyse and show the different measurement values on the display unit, a connection between PC and laptop is needed. For this purpose SAB BRÖCKSKES has different types for the individual requirements in its product range. Among others the values can be transferred at arctic temperatures with flexible cables even at low temperatures. The application isn't impeded by a rigid cable.

#### CABLE CONSTRUCTION

<b>conductor:</b>	silver-plated copper strands
<b>core insulation:</b>	PE
<b>screen:</b>	alu foil / tinned copper braiding
<b>outer sheath:</b>	special material
<b>sheath colour:</b>	blue (RAL 5015)

#### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-40°C/+90°C
<b>fixed laying:</b>	-50°C/+90°C
<b>short-time use:</b>	+125°C
<b>special feature:</b>	silicone free, Cat. 6

#### Further cable types are possible on request for example:

- ✓ Besilen® flexible with cold temperatures to -40°C / Besilen® heat resistant up to +220°C
- ✓ sheath material up to 150°C, silicone free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and number of cores appropriate for CAT 5, CAT 6, CAT 7 (dependant on plug)

#### You can choose from the following plug connectors:

- |   |  |
|---|--|
| <input type="checkbox"/> Harting RJ 45 plug     | <input type="checkbox"/> Weidmüller RJ 45 plug |
| <input type="checkbox"/> Telegärtner RJ 45 plug | <input type="checkbox"/> ODU round connector   |
| <input type="checkbox"/> Lemo round connector   |  |


#### Cable variations for example:

- ☐ 2 x 2 x 0,22 mm<sup>2</sup>
- ☐ 4 x 2 x 0,22 mm<sup>2</sup>

# HARNESSED CABLES

## Current supply cable

for data transmission and voltage supply of modules

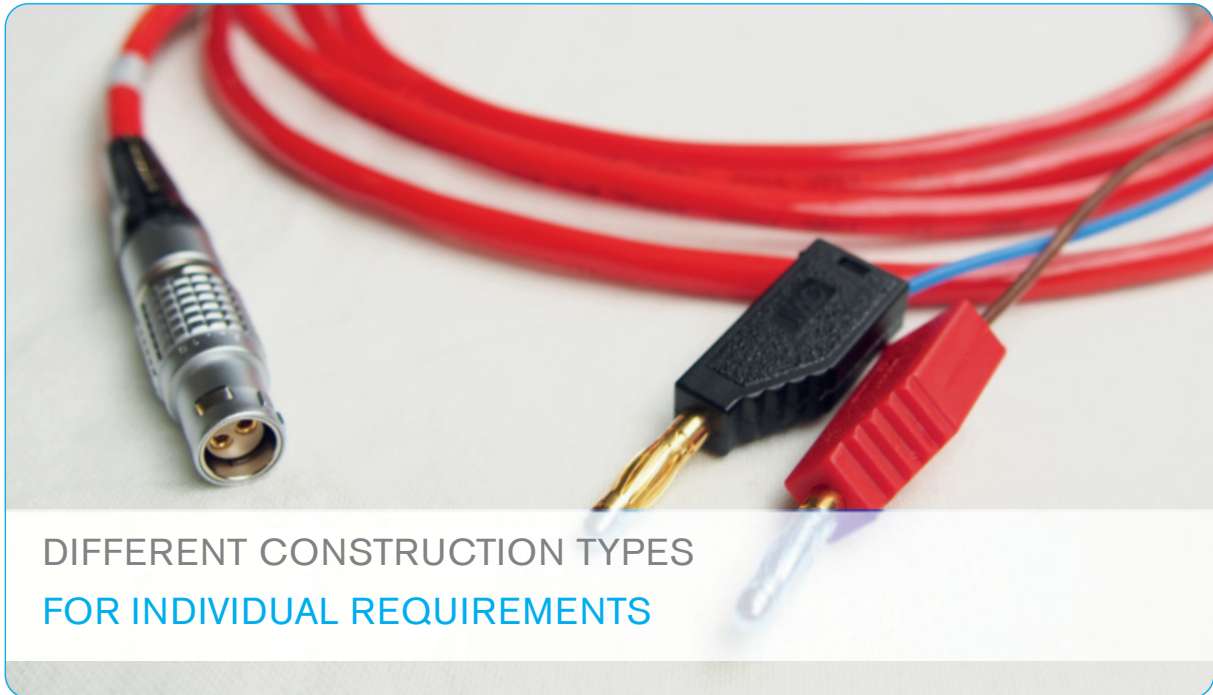

Besides different harnesses cables for data transmission, SAB BRÖCKSKES also offers various harnessing products for the current supply of modules. There are also different construction types available that can be adapted to your special requirements.

### CABLE CONSTRUCTION

<b>conductor:</b>	tinned copper strands
<b>core insulation:</b>	FEP
<b>outer sheath:</b>	special material
<b>sheath colour:</b>	traffic red (RAL 3020)

### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-40°C/+90°C
<b>fixed laying:</b>	-50°C/+90°C
<b>short-time use:</b>	+125°C
<b>special feature:</b>	silicone free

#### Further cable types are possible on request for example:

- ✓ sheath material up to +150°C, silicone free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and numbers of cores (dependant on plug)

#### You can choose from the following plug connectors:

- ☐ Lemo plug connector
- ☐ ODU plug connector
- ☐ Fischer plug connector
- ☐ Yamaichi plug connector
- ☐ segment plug

#### Connection ends for example:

- ☐ round plug connector 2-pole  
2 x segment plugs
- ☐ Lemo round plug connector 6-pole  
2 x segment plugs

#### Cable variations for example:


- ☐ 2 x 0,75 mm<sup>2</sup>
- ☐ 2 x AWG 28 + 1 x AWG +  
2 x 0,50 mm<sup>2</sup>



# HARNESSED CABLES

## Special cable

with male connector and socket plug assembly

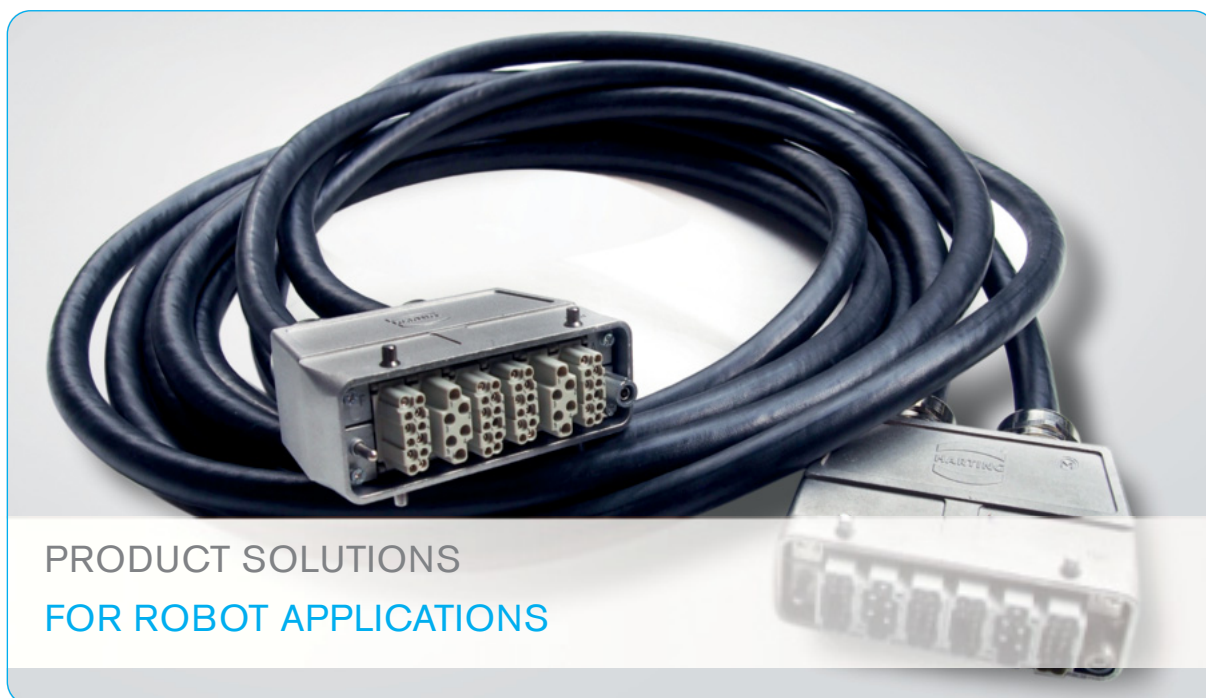

Another industrial sector in which SAB cable harnessing products are used is the robot industry. We offer a variety of product solutions which are adapted to the individual application conditions, for example a cable harness product for the control of the robot welding tongs. For this cable harness a divided, abrasion resistant servo cable is used that is connected to heavy industrial connectors with a double cable outlet.

### CABLE CONSTRUCTION

**conductor:** bare copper strands  
**core insulation:** TPK  
**screen:** tinned copper braiding  
**outer sheath:** PUR  
**sheath colour:** black (RAL 9005)

### TECHNICAL DATA

**temperature range**  
**flexible application:** -40°C/+80°C  
**fixed laying:** -50°C/+80°C  
**special feature:** abrasion resistant

#### Among others the following cable types belong to our delivery program:

- ✓ Besilen® flexible with cold temperatures to -40°C / Besilen® heat resistant up to +220°C
- ✓ sheath material up to 150°C, silicone-free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and number of cores (dependant on plug)

#### You can choose from the following plug connectors:

- ☐ Harting plug connector
- ☐ Weidmüller plug connector
- ☐ Wieland plug connector

#### Cable variations for example:

- ☐ (4 x 2 x 0,25 mm<sup>2</sup>)D + 2 x (2 x 0,50 mm<sup>2</sup>)D + (5 x 0,50 mm<sup>2</sup>)D + (5 x 1,5 mm<sup>2</sup>)D
- ☐ (4 x 2 x 0,25 mm<sup>2</sup>)D + 2 x (2 x 0,50 mm<sup>2</sup>)D + (5 x 0,50 mm<sup>2</sup>)D + (4 x 0,75 mm<sup>2</sup>)D

# HARNESSED CABLES

## Cable harness for robots

with 37-pin angle plug, AMP/Molex connector assembly



The shown product is equally used for the robot industry, particularly for paint robots. This type has got a 37-pole angle plug on the one side and an AMP Molex connector on the other side. According to the customer's requirements the cable harness can be adapted individually.

### CABLE CONSTRUCTION

**conductor:** bare copper strands  
**core insulation:** TPK  
**screen:** tinned copper braiding  
**outer sheath:** PUR  
**sheath colour:** black

### TECHNICAL DATA

**temperature range**  
**flexible application:** -40°C/+80°C  
**fixed laying:** -50°C/+80°C  
**special feature:** UL recognized

#### Further cable types are possible on request for example:

- ✓ Besilen® flexible with cold temperatures to -40°C / Besilen® heat resistant up to +220°C
- ✓ sheath material up to 150°C, silicone-free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and number of cores (dependant on plug)

#### Cable variations for example:

- (8 x 0,50 mm<sup>2</sup>)C + (4 x 0,50 mm<sup>2</sup>)C + 4 x 2 x 0,25 mm<sup>2</sup> + 4 x 0,50 mm<sup>2</sup> + 6 x 1 x 0,50 mm<sup>2</sup>D

#### You can choose from the following plug connectors:

- Molex plug connector
- Weidmüller plug connector
- Wieland plug connector
- ITT plug connector

# HARNESSED CABLES

## Cable harness for robots

with Harting connector assembly and signal socket connector assembly



### HARNESSED PRODUCTS FOR ROBOT INDUSTRY

Here is shown another cable harnessing product for robot industry. This type shows a Harting plug connector on one side and a signal socket connector on the other side. According to the customer's requirements the cable harness can be adapted individually.

#### CABLE CONSTRUCTION

<b>conductor:</b>	bare copper strands
<b>core insulation:</b>	TPK
<b>screen:</b>	tinned copper braiding
<b>outer sheath:</b>	PUR
<b>sheath colour:</b>	black

#### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-15°C/+80°C
<b>fixed laying:</b>	-50°C/+80°C
<b>special feature:</b>	UL recognized, CSA approved

#### Further cable types are possible on request for example:

- ✓ Besilen® flexible with cold temperatures to -40°C / Besilen® heat resistant up to +220°C
- ✓ sheath material up to 150°C, silicone-free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and number of cores (dependant on plug)

#### Cable variations for example:

- 8 x (2 x 2 x 0,14 mm<sup>2</sup> + 2 x 0,34 mm<sup>2</sup>)C + 4 x 0,50 mm<sup>2</sup>

#### You can choose from the following plug connectors:

- |   |  |
|---|--|
| <input type="checkbox"/> Harting plug connector     | <input type="checkbox"/> Weidmüller plug connector |
| <input type="checkbox"/> Wieland plug connector     | <input type="checkbox"/> ITT plug connector        |
| <input type="checkbox"/> Intercontec plug connector |  |



# HARNESSED CABLES

## Multi bus cable

with 17-pole socket and plug connector



HIGH FLEXIBILITY WITH FULL PROTECTION  
AGAINST ELECTRO MAGNETIC INTERFERENCE

This cable harnessing product is used in the robot industry as highly flexible type for the robot cable-hose assembly or as standard flexible type connected to the robot base. Both types guarantee full protection against electro magnetic interference. M23 round plug connectors in straight and angle version are used. Metal or plastic types are available.

### CABLE CONSTRUCTION

**conductor:** bare copper strands  
**core insulation:** TPK  
**screen:** tinned copper braiding  
**outer sheath:** PUR  
**sheath colour:** red lilac

### TECHNICAL DATA

**temperature range**  
**flexible application:** -20°C/+70°C  
**fixed laying:** -30°C/+70°C  
**special feature:** EMC protected

#### Further cable types are possible on request for example:

- ✓ Besilen® flexible with cold temperatures to -40°C / Besilen® heat resistant up to +220°C
- ✓ sheath material up to 150°C, silicone-free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and number of cores (dependant on plug)

#### Cable variations for example:

- 2 x (2 x 0,25 mm<sup>2</sup>)D + 2 x (2 x 0,34 mm<sup>2</sup>)D + 1,0 mm<sup>2</sup> + (2 x 0,29 mm<sup>2</sup>)D + 2 x (2 x 1,0 mm<sup>2</sup>)D


#### You can choose from the following plug connectors:

- Binder plug connector
- Hummel plug connector
- Weidmüller plug connector
- Intercontec plug connector
- Phoenix plug connector

# HARNESSED CABLES

## FEP insulated hybrid cable

with connector housing

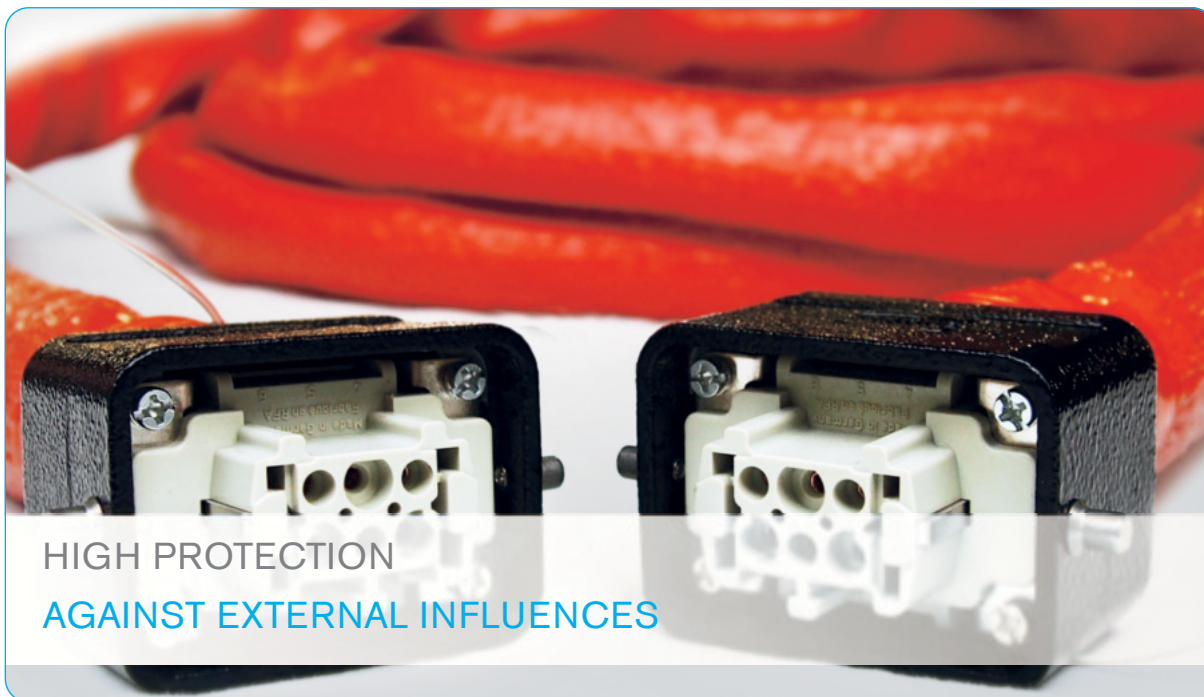

The steel industry is another field where SAB BRÖCKSKES cable harnessing products are used. The above shown cable harness consists of a hybrid cable and 2 connector housings. Additionally a heat shrinkable sleeve protects the cable against external influences (for example fire). This special combination transfers data (Profibus) and power at the same time.

### CABLE CONSTRUCTION

**conductor:** tinned copper strands  
**core insulation:** FEP  
**screen:** tinned copper braiding  
**outer sheath:** FEP

### TECHNICAL DATA

**temperature range**  
**flexible application:** -55°C/+180°C  
**fixed laying:** -55°C/+180°C

#### Among others the following cable types belong to our delivery program:

- ✓ Besilen® flexible with cold temperatures to -40°C / Besilen® heat resistant up to +220°C
- ✓ sheath material up to 150°C, silicone-free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and number of cores

#### Cable variations for example:

- ☐ 2 x 0,22 mm<sup>2</sup> + 3 x 1,50 mm<sup>2</sup>

#### You can choose from the following plug connectors:

- ☐ Binder plug connector
- ☐ Weidmüller plug connector
- ☐ Phoenix Contact plug connector
- ☐ Harting plug connector

# HARNESSED CABLES

## Cable harness with valve connector

for special machine construction



Machine construction is another field where products from SAB BRÖCKSKES GmbH & Co. KG are used. Cable harnesses are for example installed in textile machines. The above shown product contains a current-carrying cable to supply an energy-efficient textile machine. On one side a valve connector is mounted and on the other side a conductor plate. For special machine construction, SAB offers a variety of product solutions.

### CABLE CONSTRUCTION

**conductor:** bare copper strands  
**core insulation:** PVC  
**screen:** tinned copper braiding  
**outer sheath:** PVC  
**sheath colour:** grey

### TECHNICAL DATA

**temperature range**  
**flexible application:** + 5°C/+70°C  
**fixed laying:** -40°C/+70°C

#### Further cable types are possible on request for example:

- ✓ Besilen® flexible with cold temperatures to -40°C / Besilen® heat resistant up to +220°C
- ✓ sheath material up to 150°C, silicone-free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and number of cores

#### Cable variations for example:

- 3 x 1,0 mm<sup>2</sup>

#### You can choose from the following plug connectors:

- Harting plug connector
- Weidmüller plug connector
- Wieland plug connector
- ITT plug connector



# HARNESSED CABLES

## Reeling CAT 5 cable

highly flexible with 8-pole RJ45 plug on a cable drum with angle plug



Besides the cables and cable harnesses for flexible application, SAB also offers harnessed products with reeling cables. Due to a special construction it is for example possible to produce an Ethernet cable as reeling type. This is for example used for speed measurement devices and is appropriate for outdoor use. On request SAB also offers customized solutions for a broad application range.

### CABLE CONSTRUCTION

<b>conductor:</b>	tinned copper strands
<b>core insulation:</b>	special material
<b>screen:</b>	alu foil / tinned copper braiding
<b>outer sheath:</b>	PUR
<b>sheath colour:</b>	black (RAL 9005)

### TECHNICAL DATA

<b>temperature range</b>	
<b>flexible application:</b>	-20°C/+90°C
<b>fixed laying:</b>	-20°C/+90°C
<b>special feature:</b>	silicone free, Cat. 5

#### Among others the following cable types belong to our delivery program:

- ✓ Besilen® flexible with cold temperatures to -40°C / Besilen® heat resistant up to +220°C
- ✓ sheath material up to 150°C, silicone-free
- ✓ different cable lengths
- ✓ various sheath colours and marking
- ✓ different dimensions, sections and number of cores suitable for CAT 5/ CAT 6/ CAT 7

#### Cable variations for example:

- ☐ 4 x 2 x 0,75 mm<sup>2</sup>


#### You can choose from the following plug connectors:

- ☐ Harting RJ 45 plug
- ☐ Weidmüller RJ 45 plug
- ☐ Telegärtner RJ 45 plug
- ☐ different cable drums

# HARNESSED CABLES

## Special connection cable

with 320-pin port connector and 50-pin Sub-D male connector

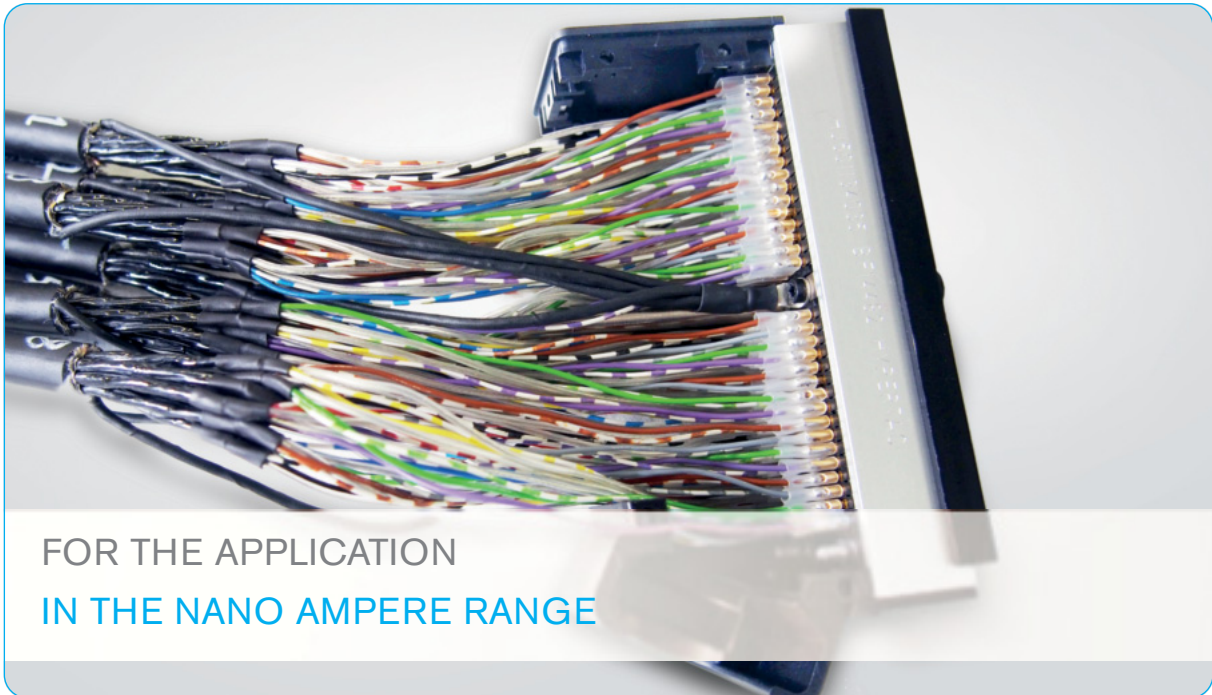

This cable harnessing product is used in test equipment. This test equipment is used for the electric function control with the production of wafers. The SAB cable harness is applied to transfer the voltage from the electronics to the specimen. Herewith, currents within the Nano ampere range are treated. It is important for this cable harnessing product that a constant current is available and the soiling of the contact surface by greases has to be avoided.

### CABLE CONSTRUCTION

**conductor:** tinned copper strands  
**core insulation:** TPK  
**screen:** alu foil  
**outer sheath:** PUR  
**sheath colour:** black (RAL 9005)

### TECHNICAL DATA

**temperature range**  
**flexible application:** -20°C/+60°C  
**fixed laying:** -20°C/+60°C


#### Cable variations for example:

- ☐ multi core cables, screened

# HARNESSED CABLES

## Harnessed Profinet cable

suitable for cable tracks with M12 male connector assembly

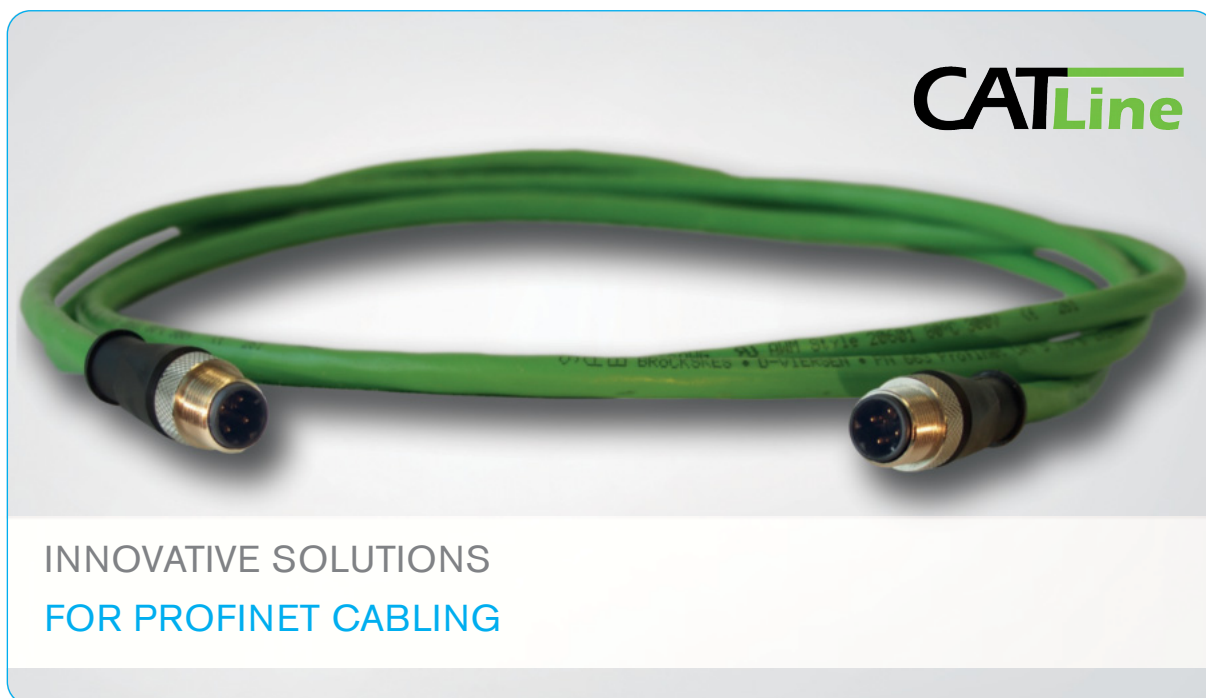

For the field bus cabling of Profinet field bus systems in industrial sectors. This cable type is used for example in cable chain applications for automation and machine and plant construction with rough environments. The PUR outer sheath is resistant against rough environmental conditions.

### CABLE CONSTRUCTION


<b>conductor:</b>	tinned copper strands
<b>core insulation:</b>	special polymer
<b>screen:</b>	alu foil and tinned copper braiding
<b>outer sheath:</b>	PUR
<b>sheath colour:</b>	green (RAL 6018)

### TECHNICAL DATA

<b>min. bending radius:</b>	continuously flexible 15 x d
<b>temperature range</b>	
<b>flexible application:</b>	-20/+70°C
<b>fixed laying:</b>	-30/+70°C
<b>special feature:</b>	characteristic impedance 100Ω ± 10Ω CAT 5 with reference to EN 50173-1, oil resistant, suitable for cable tracks

#### Pin configuration:

<b>pin1:</b>	yellow
<b>pin2:</b>	white
<b>pin3:</b>	orange
<b>pin4:</b>	blue
<b>housing:</b>	screen



#### Plug types:

- ☐ M12 plug(male) 4-pole, D-coded
- ☐ M12 socket (female) 4-pole, D-coded  
straight or tilted  
moulded or mounted



# HARNESSED CABLES

## Harnessed Profibus cable

suitable for cable tracks with M12 male connector assembly



For the field bus wiring in automation technique. These bus cables transfer Profibus signals with different cable and plug combinations. The PUR cable for cable chain applications is resistant against rough environmental conditions in industrial applications.

### CABLE CONSTRUCTION


<b>conductor:</b>	bare copper strands
<b>core insulation:</b>	TPK
<b>screen:</b>	alu foil und tinned copper braiding
<b>outer sheath:</b>	PUR
<b>sheath colour:</b>	red lilac (RAL 4001)

### TECHNICAL DATA

<b>min. bending radius:</b>	continuously flexible 12 x d
<b>temperature range</b>	
<b>flexible application:</b>	-40/+80°C
<b>fixed laying:</b>	-40/+80°C
<b>special feature:</b>	characteristic impedance at 3 - 20 MHz: $150\Omega \pm 10\%$ with reference to EN 50170, oil resistant, suitable for cable tracks

#### Pin configuration:

<b>pin1:</b>	n.b.
<b>pin2:</b>	green
<b>pin3:</b>	n.b.
<b>pin4:</b>	red
<b>pin5:</b>	n.b.
<b>housing:</b>	screen




#### Plug types:

- ☐ M12 plug(male) 5-pole, B-coded
- ☐ M12 socket (female) 4-pole, D-coded  
straight or tilted  
moulded or mounted

# HARNESSED CABLES

## Helix cable

with axial and radial outgoing cable ends

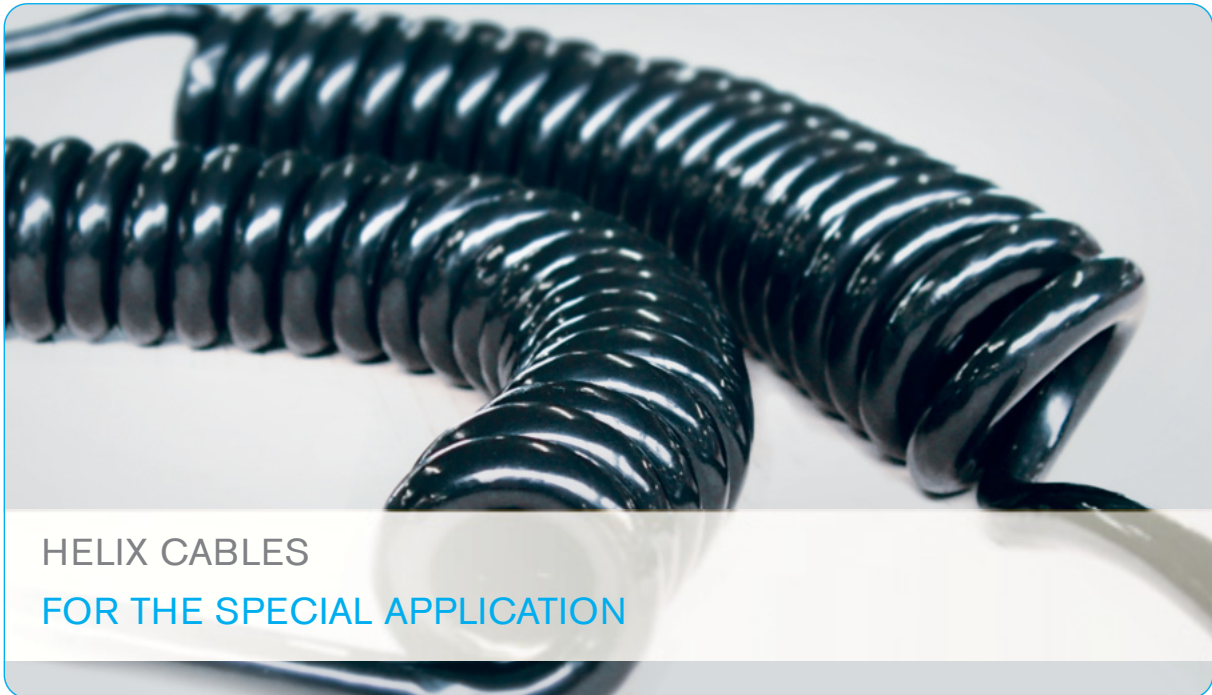

SAB BRÖCKSKES GmbH & Co. KG also offers to design cable harnessing products with helix cables. The construction of the cable harness can be adapted to your special demands. In order to fix detailed parameters we offer this contact form.

Besides the existing cables in the SAB catalogue "Flexible cables" also special cables can be offered. For such an offer we kindly ask you to furnish all details available (for new productions please note possible minimum order quantities).

It doesn't matter if radial or axial outgoing cables, end sleeves, M12 or special connectors, the cables can be chosen individually. This is also valid for the required cable lengths and helix parameters. We would be glad to submit to you our individual offer.

# HARNESSED CABLES

## Request to SAB Bröckskes

Fax: 02162/898-101 · E-Mail: info@sab-broeckskes.de

Company/Name: \_\_\_\_\_

\_\_\_\_\_

### INFORMATION ABOUT THE CABLE

SAB cable item no. (if available): \_\_\_\_\_

(otherwise): \_\_\_\_\_

\_\_\_\_\_

dimension: \_\_\_\_\_

construction: \_\_\_\_\_

\_\_\_\_\_

application (temperature, voltage where appropriate motion profile): \_\_\_\_\_

\_\_\_\_\_

### INFORMATION ABOUT HARNESSING

#### SIDE 1

##### END OPEN

- ☐ smooth cut off
- ☐ length sheath removed [mm]
- ☐ stripped length [mm]
- ☐ cable end sleeves (if yes, which requirement)

##### PLUG

- ☐ identify connector (manufacturer, item number, reference sources)
- ☐ plug (male) or socket (female)
- ☐ number of poles
- ☐ type of contact (solder/crimp/insulation displacement connector)
- ☐ encoding
- ☐ housing type (plastic/metal)
- ☐ cable exit (angled/straight)
- ☐ mounted/molded

##### CONFIGURATION

- ☐ pin assignment
- ☐ screen (if any) applied (on the housing / on pin) or cut off

#### SIDE 2

##### END OPEN

- ☐ smooth cut off
- ☐ length sheath removed [mm]
- ☐ stripped length [mm]
- ☐ cable end sleeves (if yes, which requirement)

##### PLUG


- ☐ identify connector (manufacturer, item number, reference sources)
- ☐ plug (male) or socket (female)
- ☐ number of poles
- ☐ type of contact (solder/crimp/insulation displacement connector)
- ☐ encoding
- ☐ housing type (plastic/metal)
- ☐ cable exit (angled/straight)
- ☐ mounted/molded

##### CONFIGURATION

- ☐ pin assignment
- ☐ screen (if any) applied (on the housing / on pin) or cut off

OTHER ☐ quantity / O series required

### HELIX DATA

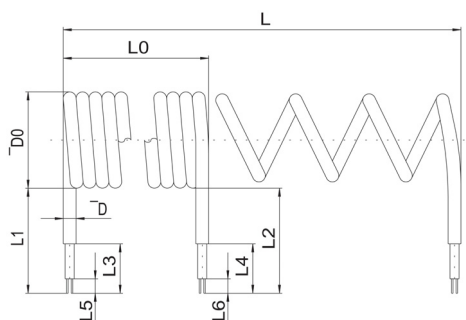


L = \_\_\_\_\_ mm      L2 = \_\_\_\_\_ mm  
L0 = \_\_\_\_\_ mm      L3 = \_\_\_\_\_ mm  
øD = \_\_\_\_\_ mm      L4 = \_\_\_\_\_ mm  
øD0 = \_\_\_\_\_ mm      L5 = \_\_\_\_\_ mm  
L1 = \_\_\_\_\_ mm      L6 = \_\_\_\_\_ mm

screen: ☐ yes ☐ no

cable ends: ☐ radial ☐ axial ☐ other



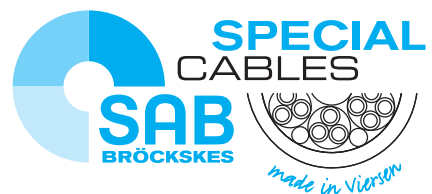

**SAB** BRÖCKSKES GMBH & CO. KG  
GREFRATHER STR. 204 - 212 B  
41749 VIERSEN · GERMANY  
TEL.: +49/2162/898-0  
FAX: +49/2162/898-101  
[WWW.SAB-WORLDWIDE.COM](http://WWW.SAB-WORLDWIDE.COM)  
[INFO@SAB-BROECKSKES.DE](mailto:INFO@SAB-BROECKSKES.DE)